


LISO FLOOR 3000

Transparent resin for concrete floors with anti-slip option

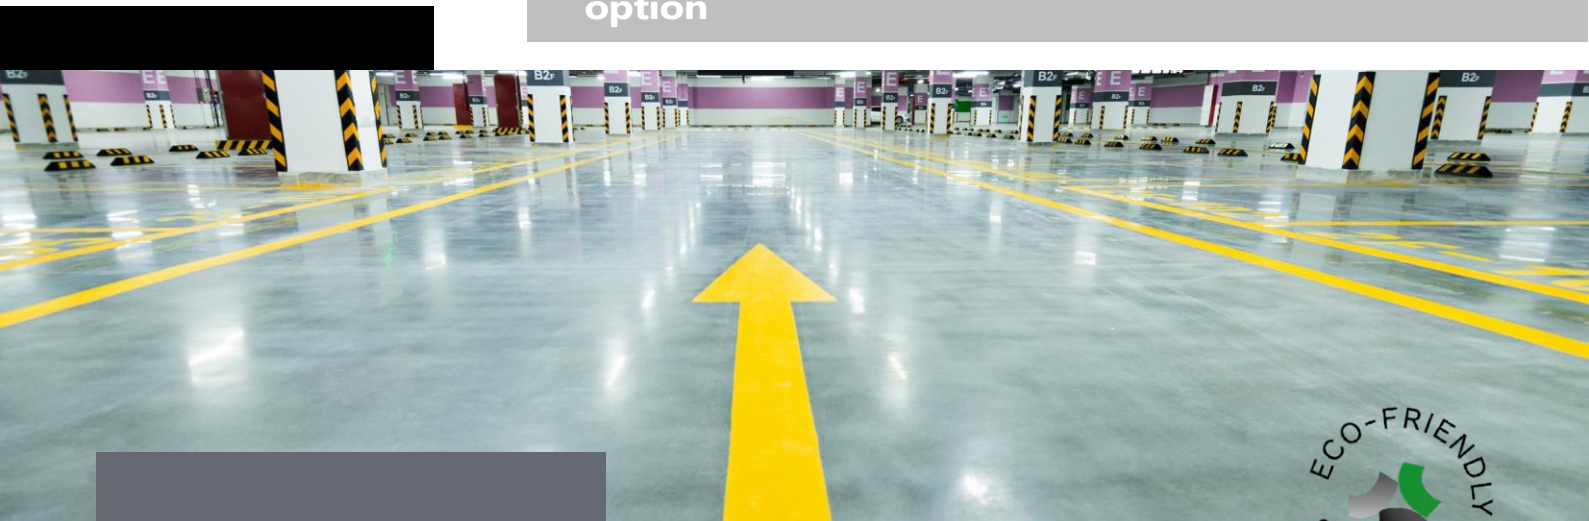

The green power
for your concrete

CHARACTERISTICS

LisoFloor 3000 is a transparent topcoat for concrete floors. This easy-to-use, roller-applied, resin-based solution provides a semi-matt finish, and is also available as an anti-slip solution.

AS : Anti-Slip

PRODUCT DESCRIPTION

Acrylic resin-based product for new and old concrete surfaces which, after 5 days, provides excellent abrasion resistance, waterproofing, dustproofing, waterproofing and resistance to many chemicals (such as oil, citrus juices, milk, vinegar and water).

Water-based, solvent-free product with very low VOC emissions. emissions.

LisoChem SRL

Rue de Le Mesnil, 34
5670 Viroinval
(Belgium)
Phone: +32 60 490 190
Mobile: +32 483 367 323
www.lisochem.com
info@lisochem.com

Manufacture & Office

Rue des Mousquetaires Gris
35 ZI de Mariembourg
5660 Belgium
Phone: +32 60 490 190
Mobile: + 32 483 367 323

LISO FLOOR 3000

Transparent resin for concrete floors with anti-slip option

The Green Power for your Concrete

BENEFITS

LisoFloor 3000 :

- Acrylic resin-based product
- For new and old concrete surfaces
- Excellent abrasion and dust resistance
- Excellent waterproofing and resistance to a wide range of chemicals, and also available in an anti-slip version
- Water-based product, with very low VOC emissions

USE

New or old concrete

For medium traffic: pedestrian

SECURITY

Please refer to the safety data sheet :

- Keep out of reach of children
- Protect from freezing
- Wear gloves and safety glasses
- Cover all metal and glass parts before application

PROPERTIES

Transparent

Color : 5 RAL available

Density : 1,1

Shelf life: 6 months in original, closed container

LISOFLOOR 3000

Transparent resin for concrete floors with anti-slip option

The Green Power for your Concrete

PREPARATION, APPLICATION, MAINTENANCE

General notes :

- Never apply in frost or rain. Never dilute or add other products or liquids to the base product.
- It is very important to mix LisoFloor products thoroughly before and during use.
- Never polish or buff the surface!

Preparation and application : (See application system)

Never apply when it's freezing, raining or very hot. Ideal temperature between 8° C and 27° C.

- Clean surface several times with vacuum cleaner and scrubber-dryer.
- Mix well
- Apply a 1st coat with a roller (approx. 8 m²/L)
- Allow to dry for at least 45 minutes
- Apply 2nd coat by roller (approx. 10 m²/L)
- Allow to dry for at least 45 minutes
- Allow to dry for at least 24 hours for pedestrian traffic and 7 to 8 days for heavier traffic and optimum efficiency

Maintenance :

Clean surfaces at least once a week with a scrubber-dryer and neutral soap

PACKAGING

Bucket..... 20L